

Live Trac EZ [Hardwired Unit]

4G LTE

Spec Sheet

- Live Vehicle Tracker
- Installs in Seconds
- Easily Transfer From Vehicle To Vehicle



LIVE TRAC EZ

Live Trac EZ Tracking Screens




Alert Zone View



Live Chat Support View



Historical Playback View

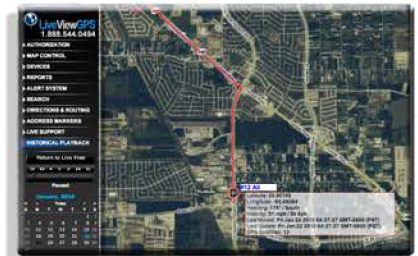

Dimensions	1.8"W x 2.18"L x 1.08"H
Operating Temperature	-30° C to +75° C (-22F to +158F)
Power Source	9 - 16 Volts DC
Typical full-power current	70mA at 12 Volts DC

www.LiveViewGPS.com

Communication Protocol	SMS, GPRS (UDP)
Update Frequency	1-second, 5-second, or 10-second position updates (truly LIVE tracking!)
OBDII Data	Fuel level , Instantaneous MPG
Housing	Rugged textured plastic enclosure, V fire rated
Notifications	20 + reports available
Historical Playback	90 days of historical playback stored at server
Reporting	Individual Vehicle Report, Enhanced Vehicle Report, Start/Stop Report, and more...
Diagnostics	Diagnostics via SMS or TCP diagnostic messages
Applications	Ranges from everyday tracking to complete fleet solutions
Shock and Vibration	In accordance with SAEJ1455